



**SOT-23-3L Encapsulate Three Terminal Voltage Regulator**

**CJ79L06** Three-terminal negative voltage regulator

**SOT-23-3L**

- 1. GND
- 2. OUT
- 3. IN



**FEATURES**

Maximum Output current

$I_{OM}$ : 0.1 A

Output voltage

$V_o$ : -6 V


**ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)**

Parameter	Symbol	Value	Units
Input Voltage	$V_i$	-30	V
Operating Junction Temperature Range	$T_{OPR}$	0~+125	°C
Storage Temperature Range	$T_{STG}$	-55~+150	°C

**ELECTRICAL CHARACTERISTICS ( $V_i=-11V, I_o=40mA, 0^{\circ}C < T_j < 125^{\circ}C, C_1=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)**

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_o$	$T_j=25^{\circ}C$	-5.75	-6.0	-6.25	V
		$-8V \leq V_i \leq -20V, I_o=1mA \sim 40mA$	-5.7	-6.0	-6.3	V
		$-8V \leq V_i \leq V_{MAX}, I_o=1mA \sim 70mA$	-5.7	-6.0	-6.3	V (note)
Load Regulation	$\Delta V_o$	$T_j=25^{\circ}C, I_o=1mA \sim 100mA$		21	80	mV
		$T_j=25^{\circ}C, I_o=1mA \sim 40mA$		11	40	mV
Line regulation	$\Delta V_o$	$-8V \leq V_i \leq -20V, T_j=25^{\circ}C$		35	175	mV
		$-9V \leq V_i \leq -20V, T_j=25^{\circ}C$		29	125	mV
Quiescent Current	$I_q$			3.9	6.0	mA
Quiescent Current Change	$\Delta I_q$	$-9V \leq V_i \leq -20V$			1.5	mA
	$\Delta I_q$	$1mA \leq V_i \leq 40mA$			0.1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100KHz$		46		uV
Ripple Rejection	RR	$-9V \leq V_i \leq -19V, f=120HZ, T_j=25^{\circ}C$	40	48		dB
Dropout Voltage	$V_d$	$T_j=25^{\circ}C$		1.7		V

**TYPICAL APPLICATION**

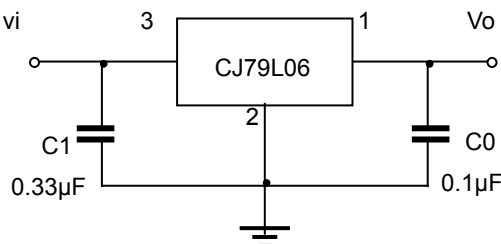

Note 1: Bypass capacitors are recommended for optimum stability and transient response and should be located as close possible to the regulators.